


# EL-kap Bouldering Wall

- 1- CERAMIC/FIBERGLASS
- 2- 2 GEL COAT COLORS  
SANDSTONE  
GRANITE
- 3- 20" ANCHORS GLASSED  
INTO WALL
- 4- CAN BE INSTALLED AT  
8' HIGH TO 6' HIGH
- 5- 100 HANDHOLDS INCLUDED
- 6- NO HANDHOLDS WITH  
NEGATIVE DRAFT TO GET  
CLOTHING HUNG UP ON.
- 7- 500 lbs- EASY SHIPPING  
AND INSTALLATION.

## INSTALLATION INSTRUCTIONS

- 1- EXCAVATE A HOLE 8 FT. LONG  
BY 3 1/2 FT. WIDE AND TO DEPTH  
20" (FOR 8 FT WALL HEIGHT)  
32" (FOR 7 FT WALL HEIGHT)  
42" (FOR 6 FT WALL HEIGHT)
- 2- STAND WALL ON ANCHORS  
CENTERED IN HOLE.
- 3- WET-SET WALL USING 3/4 CU YD  
CEMENT (TO APPROX. 8" DEPTH  
IN BOTTOM OF HOLE)
- 4- LET CEMENT CURE FOR 72 HOURS.
- 5- BACK-FILL HOLE TO GRADE LEVEL.
- 6- PLACE LANDING SURFACE MATERIAL  
PER PLAYGROUND REQUIREMENTS.
- 7- FALL-ZONE EXTENDS A MINIMUM OF  
6 FEET FROM FACE OF WALL ALL SIDES.

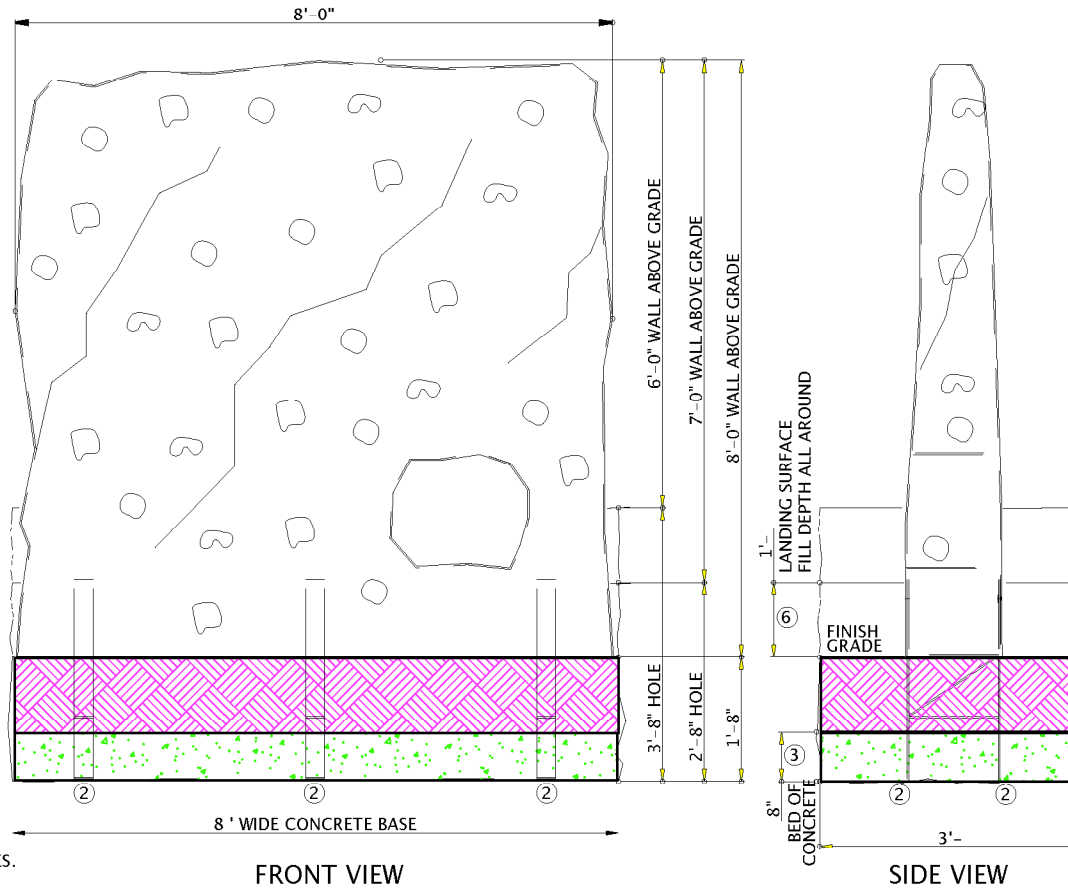

FRONT VIEW

SIDE VIEW